





Notes:
25 mm dome tweeter,
treated silk dome

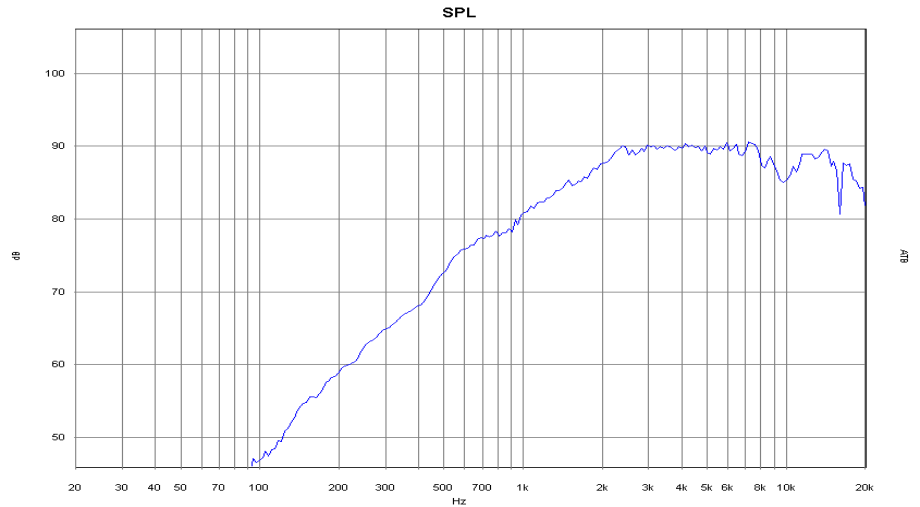

impedance: 8 Ω
nom. power: 100 watts*
SPL 1W/1m: 90 dB
fs: 950 Hz
Re: 7.0 Ω
Le: 0.01 mH
Qms: 1.4
Qes: 2.7
Qts: 0.9
VAS: -- l
Mms: -- g
Rms: -- kg/s
Cms: -- mm/N
B*I: -- Tm
Sd: 6.0 cm²
Xmax: -- mm
weight: 0.5 kg
magnet: 9 oz
voice coil $\varnothing$: 25 mm

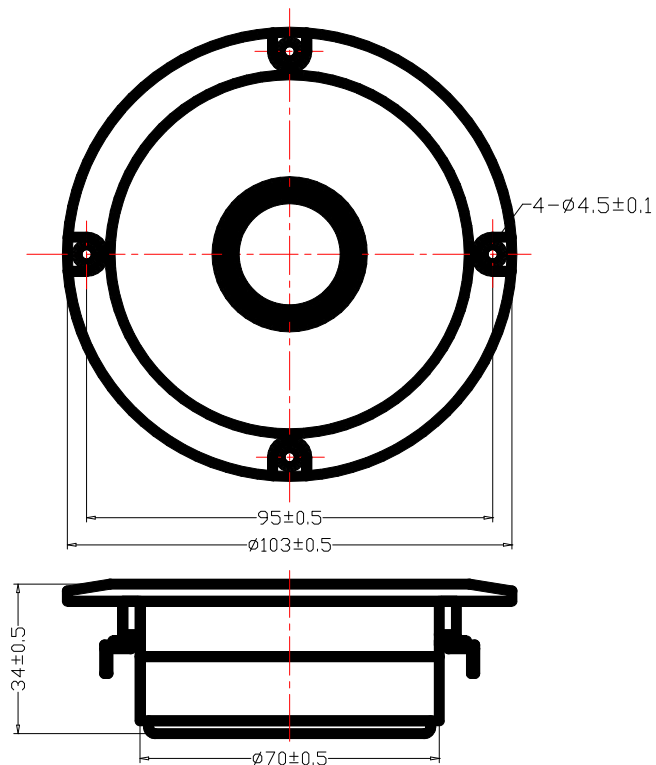

*crossover 12dB/Oct. 4000Hz

TECHNICAL DATA ARE MEASURED WITH ATB – EQUIPMENT ACCORDING EN – 60268 –5.

FOR PRODUCT IMPROVEMENT HKM RESERVES ALTERATIONS IN SPECIFICATIONS AND DESIGN WITHOUT FURTHER ANNOUNCEMENT FOR

TOLERANCES OF TECHNICAL DATA REFER TO HKM ´S MANUAL OF TECHNICAL DATA

FOR INFORMATION CONTACT: TEL.: +49 9073 / 9585 0, FAX.: +49 9073 / 9585 55, E-MAIL: HKM.MEINDL@T-ONLINE.DE